



Product Information Sheet



Sheet Number: **0075**
Rev 20-04-10



Flexible Pointing

Acrylic water based flexible pointing for roof tiles and ridges caps

Roofbond Flexible Pointing

Roofbond Flexible Pointing is an acrylic compound deigned to point ridge caps on concrete and terracotta roof tiles. We have had independent testing done on shieldcoats Pointing and it meets the C3 standard for concrete tiles. Roofbond Flexible Pointing comes in a range of colours and is applied by pointing trowel. This product has a 10 year warranty.

General Application Guide:

Apply Roofbond Flexible Pointing using an suitable pointing trowel to ridge cap sides and noses as well as three and four way caps.

Substrate Application Information:

Clean surfaces thoroughly.

Point approx. 1 metre of ridge capping and trowel to a steeled finish. Lubricate trowel with water.

Can be applied up to 5 mm thick. Greater thickness increases drying time, sagging and cost.

Weep holes should be put in before curing has progressed too far.

NOTES:

To "wet up" Roofbond Flexible Pointing **DO NOT** add water, just agitate with a trowel

Clean up: Clean tools with water before Roofbond Flexible Pointing has dried.


Drying time: On warm days Roofbond Flexible Pointing will be water-resistant after 2 hours. Allow longer curing time for low temperatures and high humidity conditions.

Never apply if rain is likely within two hours.

Caution: Do not use when temperature is below 5°C. Do not store in direct sunlight. Keep lid tightly affixed.



Note: There are many substrates on the market. Please consult Shieldcoat for further information regarding applications not on this sheet.

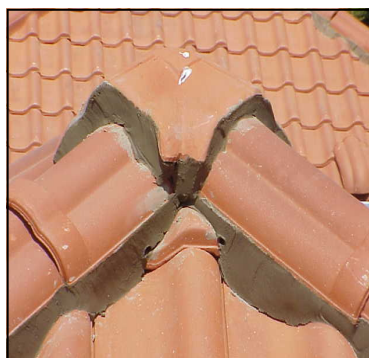

Specifications:

(all dry times are considered at 25° C and at 50% humidity)

Roofbond Flexible Pointing:

Surface Dry: 4 -5 hours

Top Coat: 12 hours

Hard Dry: 4 -5 days

Wet Film Thickness: 3-5mm

Dry Film Thickness: 3-5mm

Thinning: No thinning required normally. If desired thin with water sparingly.

Clean Up: Clean up with water



Top Picture: Roofbond Flexible Pointing.

Bottom Picture: Roofbond Flexible Pointing and Roofbond Painted Tile Roof.

Roofbond Flexible Pointing comes in 15 litre pails.

See **MSDS for safety information**

Features:

- Excellent Adhesion
- Choice of Colours
- Flexible
- Easy To Apply
- Durable
- Pre Mixed
- Best on Market

Benefits:

- Good mechanical fastening of ridges
- Water based
- Flexible
- Easily trowelled
- 10 year warranty
- Environmentally friendly
- Excellent colour fastness

Shieldcoat has become the first paint manufacturer in Australia to meet the international environmental standard, ISO 14001