



Product Information Sheet



Sheet Number: **0032**

Rev 22-11-06



COVERCOAT W Stencilshield Sealer Urethane/ Acrylic water based sealer

Features:

ATTAR anti-slip tested



Chemical Resistant Clear Sealer



Flexible



Easy To Apply



Durable



Pre Mixed



Resists marking from hot tires



Benefits:

Low Risk Of Slip-ping



Clean up easy



Allows for some substrate move-



Airless Sprayed



Lasts for Years



High gloss




Environmentally friendly



Shieldcoat has become one of the first paint manufacturer in Australia to meet the international environmental standard, ISO 14001

Covercoat W is a urethane and acrylic blended water based sealer for protecting and providing a high gloss finish for Stencilshield coatings. Covercoat W has a low odour, is very durable and environmentally friendly.

General Application Guide: Apply one coat of Covercoat W in clear by Airless sprayer using 517 tip the day after Stencilshield has been applied and stencil pattern or tape has been removed and discarded.

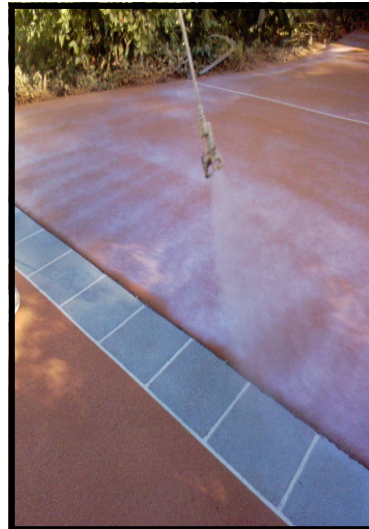

Specifications:

(all dry times are considered at 25° C and at 50% humidity)

Covercoat W:

Surface Dry: 2-4 hours

Top Coat: 12 hours

Hard Dry: 3 -5 days

Wet Film Thickness: Approx. 100 microns

Dry Film Thickness: Approx. 50 microns

Thinning: No thinning required normally. If desired thin with water sparingly.

Clean Up: Clean up with water



Notes: Covercoat W should not be applied late in the day or when moisture is present in the air or on the surface. Covercoat W can be reapplied in approximately 2 years to maintain the Stencilshield surface. Simply clean by light water blasting allow to dry and apply one more coat of Covercoat W.

Top Picture: Covercoat W applied to Stencilshield with airless spray and 517 tip.

Right Picture: Covercoat W applied to Stencilshield.

Products come in 15 litre pails.

See MSDS for safety information